

SHCDC

DC Switching Solid State Relays



Description

The **SHCDC** is a DC output Industrial Solid-State Relay ideal for applications where fast switching response times are critical. It is well-suited for applications requiring a high number of switching cycles, as its lifetime is not affected by frequent switching. It can be mounted on a panel or heatsink and is controlled by a DC voltage ranging from 4 to 32 V and includes an LED status output to indicate the presence of control voltage on the SSR.

Applications

- DC heaters
- Solenoid valves
- Test equipment
- Battery Charging Stations
- DC Motor Control
- Lighting Control
- Telecommunications
- Industrial Automation

Main Features

- Low power dissipation output MOSFET
- 100 ADC maximum output current up to 60 VDC
- 50 ADC maximum output current up to 200 VDC
- 10 ADC maximum output current up to 500 VDC
- Switching frequency up to 1000 Hz
- 4-32 VDC control voltage range
- LED for control presence indication
- Clip-on IP 20 protection cover
- Self-lifting terminals
- Housing free of moulding mass
- 3750 Vrms isolation between input and output
- Fast response times to switch ON and OFF

Part Numbering System

| Code | Option | Description | Notes |
|---------|--------|--------------------------------------|---------------------------------|
| SHC-DC- | | Product Series | |
| - | 06 | Operational Voltage Range: 1-60 VDC | |
| | 20 | Operational Voltage Range: 1-200 VDC | |
| | 50 | Operational Voltage Range: 1-500 VDC | |
| DC | - | Control voltage: 4-32 VDC | *4.5-32VDC for SHC20DC.. models |
| - | 10 | 10A Rated Load Current | |
| | 20 | 20A Rated Load Current | |
| | 50 | 50A Rated Load Current | |
| | 100 | 100A Rated Load Current | |


Example: **SHC** **06** **DC** **100**





Structure

| Element | Component | Function |
|---------|--------------------|---|
| 1+ | Power connection | Load connection or positive supply connection |
| 2- | Power connection | Load connection or ground supply connection |
| 3/A1+ | Control connection | Control supply signal |
| 4/A2- | Control connection | Ground connection for control |
| LED | Control indication | Indicates presence of control voltage |

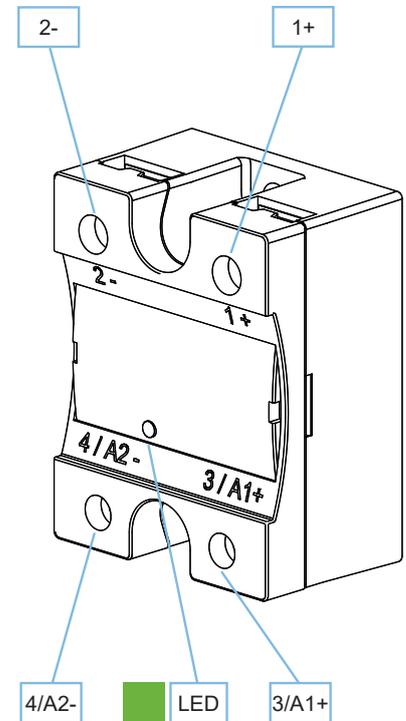

Dimensions

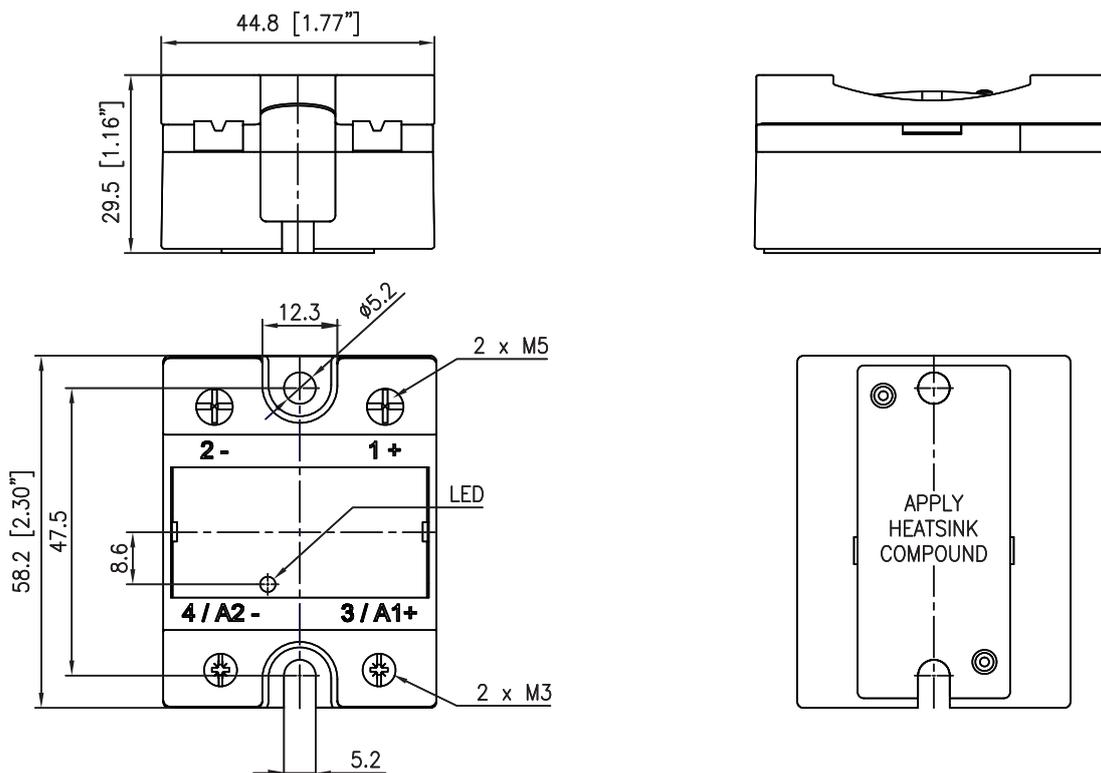


Fig. 1 SHCDC Dimensions

Dimensions in mm unless otherwise noted

General Specifications

| | |
|-------------------------|---|
| Housing material | Noryl, black |
| Mounting | Panel mount |
| Touch protection | IP20 |
| Isolation | Input and output to case: 3750 Vrms Input to output: 3750 Vrms |
| Weight | approx. 83 g |
| LED indication | Continuously ON green LED when control input is applied |

Specifications are at a surrounding temperature of 25°C unless otherwise specified.

Input Specifications

| | SHC06DC.. | SHC20DC.. SHC50DC.. |
|--|-----------|------------------------|
| Control Voltage Range | 4-32 VDC | 4.5-32 VDC |
| Pick-Up Voltage¹ | 4 VDC | 4.5 VDC |
| Drop-Out Voltage | 1.2 VDC | |
| Maximum Reverse Voltage | 32 VDC | |
| Maximum Switching Frequency² | 1000 Hz | |
| Response Time Pickup @ $V_{out} = 24$ VDC, t_{on}^3 | ≤100 μs | |
| Response Time Drop-Out, t_{off}^3 | ≤100 μs | ≤150 μs |
| Input Current @ 40°C | <16 mADC | |

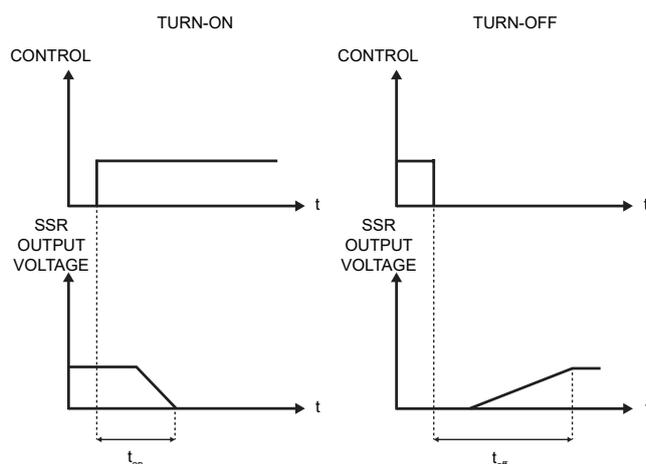


Fig. 2 Response Time Characteristics

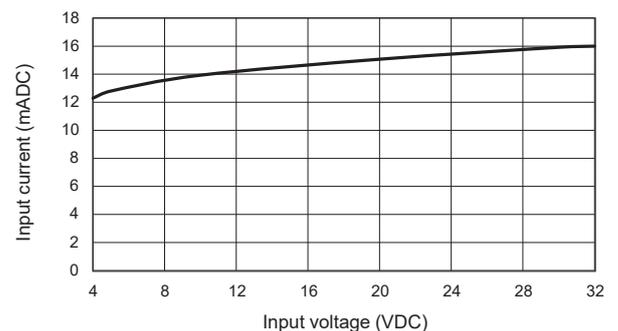


Fig. 3 Input Voltage vs. Input Current Curve

- 1: Pick-up voltage increases to 5.5 VDC at operating temperatures lower than -20°C
- 2: Output current has to be derated at high switching frequencies. Refer to the Current derating vs. switching frequency section
- 3: Response times will be longer for lower output voltages (<24 VDC)

Output Specifications

| | SHC06DC | SHC20DC | | SHC50DC |
|---|--------------------|-----------|-------------------------|-----------|
| Max. Operational Current: DC 1 Rating | 100 A | 20 A | 50 A | 10A |
| Absolute Max. Output voltage | 60 VDC | 200 VDC | | 500 VDC |
| Operational Voltage Range, Ue | 1-60 VDC | 1-200 VDC | 1-200 VDC (150 VDC*) | 1-500 VDC |
| Output Protection | Integrated transil | | | |
| Leakage Current @ Rated Voltage | 0.1 mADC | | | |
| Minimum Operational Current | 5 mADC | | | |
| Repetitive Overload Current UL508: T _{AMB} =40°C, t _{ON} =1 s, t _{OFF} =9 s, 50 cycles | 150 A | 30 A | 75 A | 15A |

* Please refer to note found in the Connection diagrams section

Current Derating vs. Switching Frequency

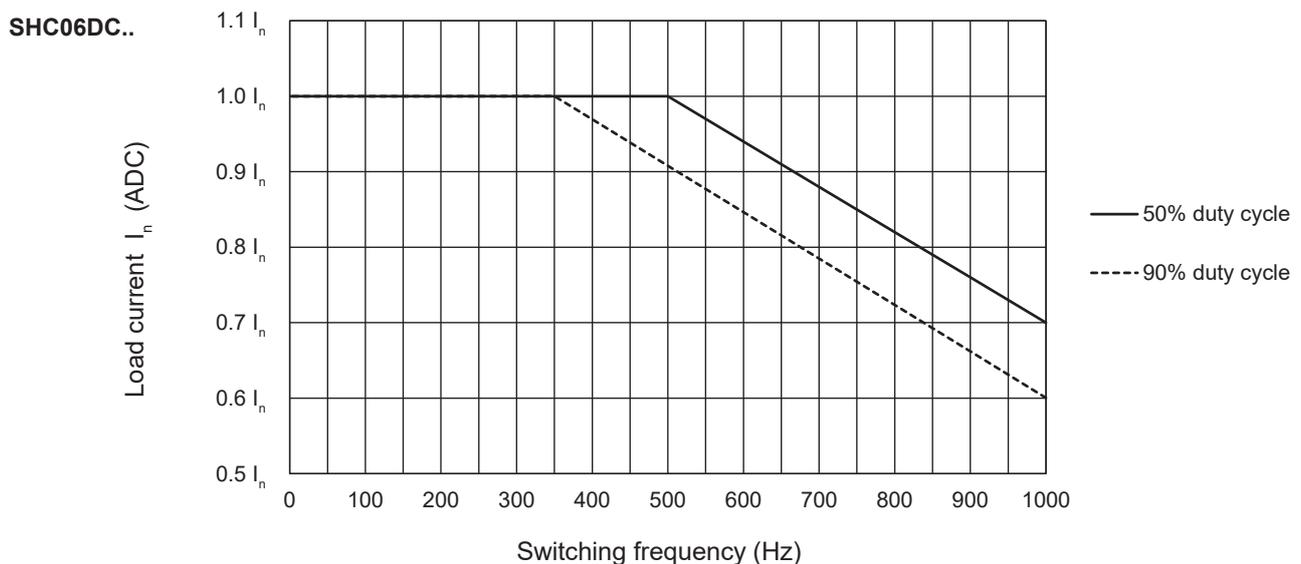


Fig. 4 Current Derating vs. Switching Frequency



SHC20DC..

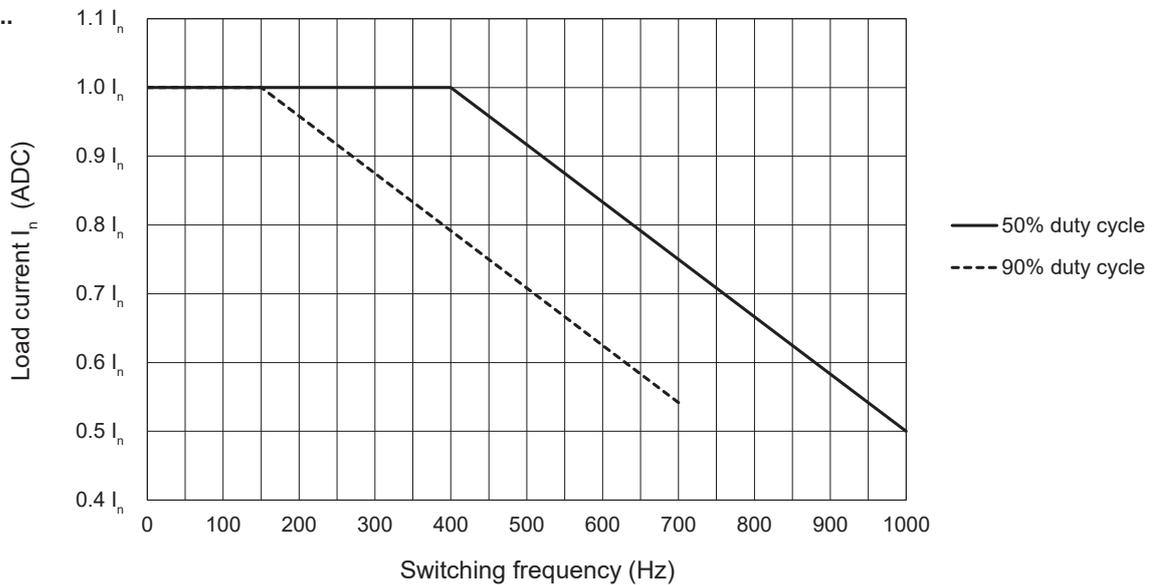


Fig. 5 Current Derating vs. Switching Frequency⁴

SHC50DC..

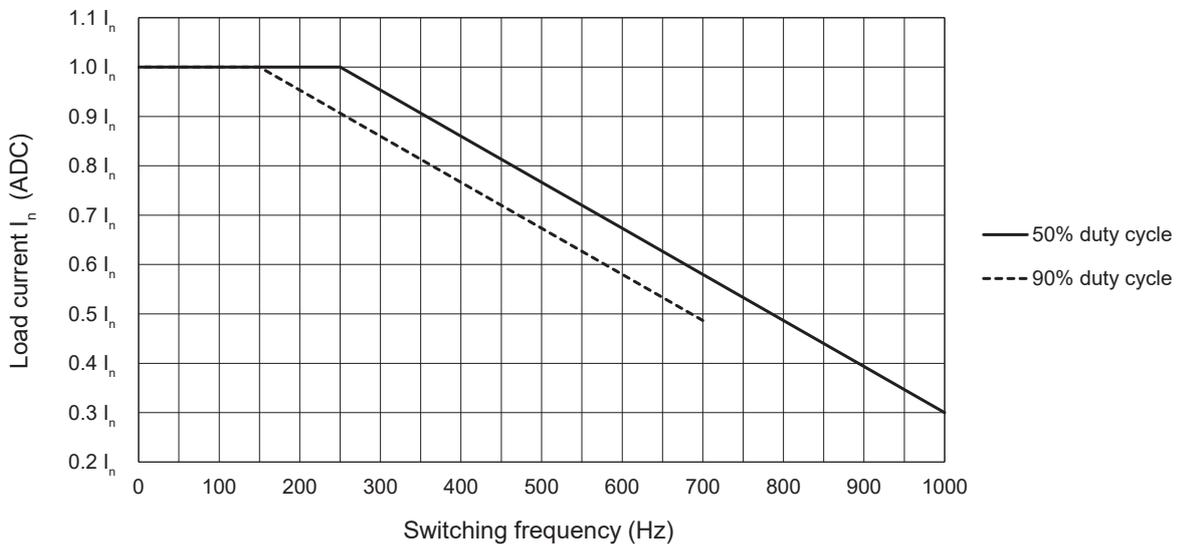


Fig. 6 Current derating vs. switching frequency⁴

4. At 90% duty cycle, the switching frequency for the SHC20DC.. and SHC50DC.. is limited to 700 Hz. This limitation is related to the response time drop out of 150 μ s for these models. For example:
- OFF time at a switching frequency of 800Hz with 90% duty cycle is 125 μ s, that is lower than the time needed for the SSR to switch OFF (150 μ s) so the SSR output would not switch OFF
 - OFF time at a switching frequency of 600Hz with 90% duty cycle is 167 μ s which is greater than the time needed for the SSR to switch OFF (150 μ s)



Output Power Dissipation

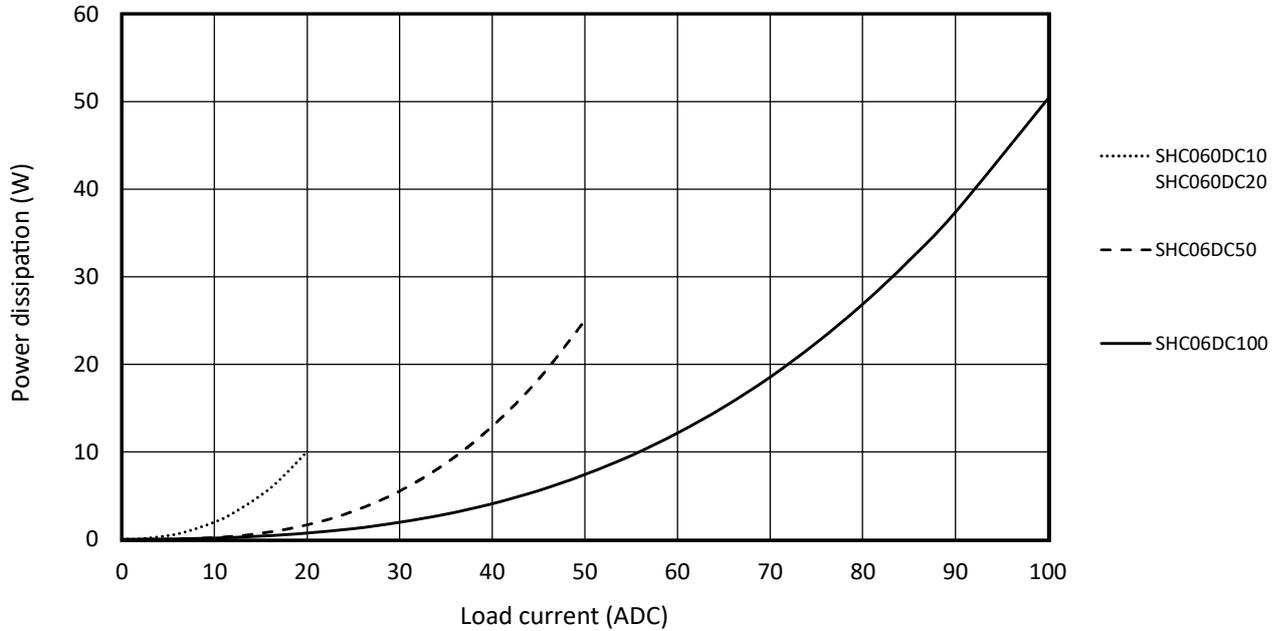


Fig. 7 Output power dissipation graph

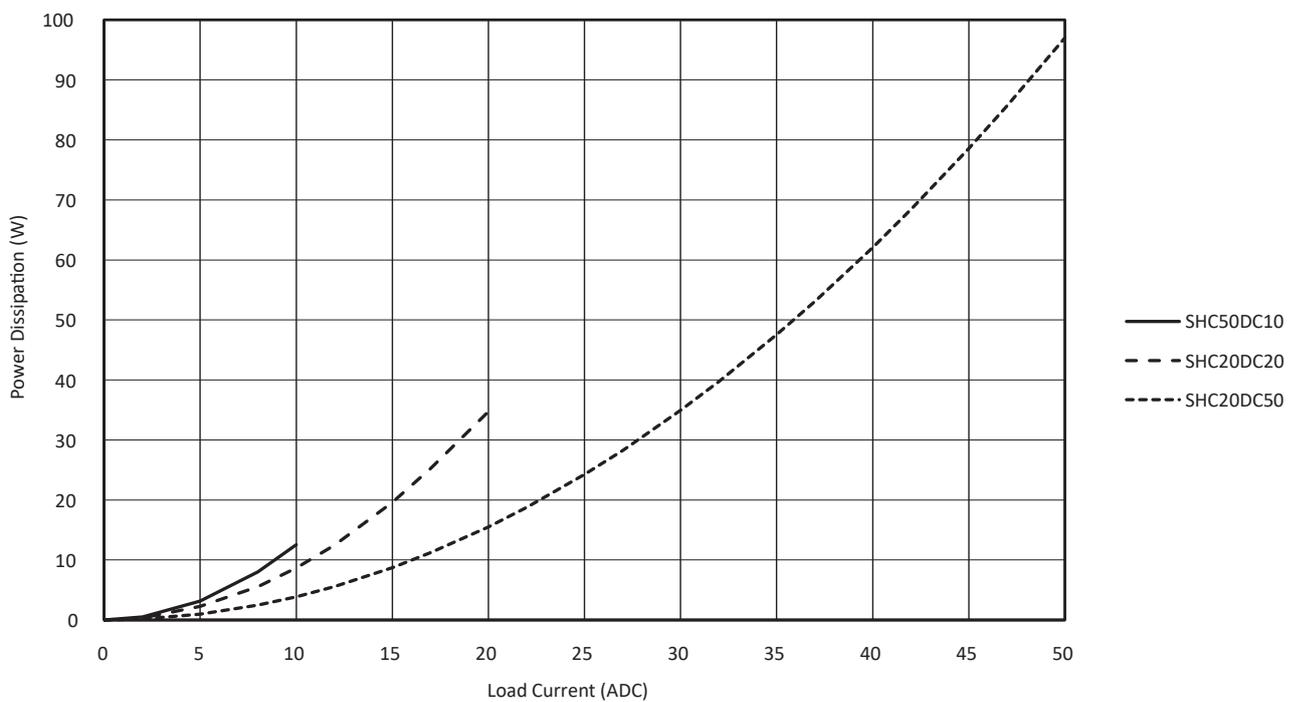


Fig. 8 Output power dissipation graph



Heatsink Selection

Note: The heatsink selection in tables below is valid only when a fine layer of silicon based thermal paste (with a similar thermal resistance to that specified for R_{thcs} in the Thermal data section) is utilized. The SSR will overheat if this heatsink selection is used for heatsink assemblies using a thermal interface material having a higher R_{thcs} than indicated in the Thermal data section.

Thermal resistance (°C/W) of SHC06DC100

| Load current (A) | Surrounding Ambient Temperature (°C) | | | | | | |
|------------------|--------------------------------------|------|------|------|------|------|------|
| | 20 | 30 | 40 | 50 | 60 | 70 | 80 |
| 100 | 1.8 | 1.4 | 1.1 | 0.73 | 0.4 | - | - |
| 90 | 2.4 | 1.9 | 1.5 | 1.0 | 0.6 | 0.21 | - |
| 80 | 3.3 | 2.7 | 2.0 | 1.4 | 0.88 | 0.37 | - |
| 70 | 4.8 | 3.8 | 2.9 | 2.1 | 1.3 | 0.61 | - |
| 60 | 7.6 | 5.9 | 4.4 | 3.1 | 2.0 | 0.98 | - |
| 50 | 14.0 | 10.2 | 7.4 | 5.1 | 3.2 | 1.6 | 0.27 |
| 40 | nh | nh | 15.5 | 9.9 | 5.9 | 2.9 | 0.64 |
| 30 | nh | nh | nh | nh | 14.2 | 6.3 | 1.5 |
| 20 | nh | nh | nh | nh | nh | nh | 4.2 |
| 10 | nh | nh | nh | nh | nh | nh | nh |

Thermal resistance (°C/W) of SHC20DC20

| Load current (A) | Surrounding Ambient Temperature (°C) | | | | | | |
|------------------|--------------------------------------|------|------|------|------|------|------|
| | 20 | 30 | 40 | 50 | 60 | 70 | 80 |
| 20 | 3.4 | 2.8 | 2.2 | 1.7 | 1.2 | 0.71 | 0.27 |
| 18 | 4.8 | 3.9 | 3.1 | 2.4 | 1.7 | 1.1 | 0.53 |
| 16 | 7.1 | 5.7 | 4.5 | 3.4 | 2.5 | 1.7 | 0.91 |
| 14 | 11.5 | 9.0 | 6.9 | 5.2 | 3.8 | 2.6 | 1.5 |
| 12 | nh | 16.1 | 11.7 | 8.5 | 6.1 | 4.1 | 2.4 |
| 10 | nh | nh | nh | 16.3 | 10.6 | 6.7 | 3.9 |
| 8 | nh | nh | nh | nh | nh | 13.5 | 7.0 |
| 6 | nh | nh | nh | nh | nh | nh | 17.5 |
| 4 | nh | nh | nh | nh | nh | nh | nh |
| 2 | nh | nh | nh | nh | nh | nh | nh |

Thermal resistance (°C/W) of SHC20DC50

| Load current (A) | Surrounding Ambient Temperature (°C) | | | | | | |
|------------------|--------------------------------------|------|------|------|------|------|------|
| | 20 | 30 | 40 | 50 | 60 | 70 | 80 |
| 50 | 1.1 | 1.0 | 0.79 | 0.60 | 0.42 | 0.24 | - |
| 45 | 1.6 | 1.4 | 1.1 | 0.86 | 0.62 | 0.39 | 0.17 |
| 40 | 2.3 | 1.9 | 1.6 | 1.2 | 0.92 | 0.62 | 0.33 |
| 35 | 3.4 | 2.8 | 2.3 | 1.8 | 1.4 | 1.0 | 0.55 |
| 30 | 5.3 | 4.4 | 3.5 | 2.8 | 2.1 | 1.5 | 0.92 |
| 25 | 9.3 | 7.5 | 5.9 | 4.6 | 3.4 | 2.4 | 1.5 |
| 20 | nh | 16.5 | 11.9 | 8.7 | 6.2 | 4.2 | 2.5 |
| 15 | nh | nh | nh | nh | 15.6 | 9.2 | 5.1 |
| 10 | nh | nh | nh | nh | nh | nh | 17.5 |
| 5 | nh | nh | nh | nh | nh | nh | nh |

Note: 'nh' means no heatsink necessary. The SSR should still be tightened to a surface to ensure optimal thermal dissipation.



Thermal resistance (°C/W) of SHC06DC10, SHC06DC20

| Load current (A) | Surrounding Ambient Temperature (°C) | | | | | | |
|------------------|--------------------------------------|------|------|------|------|------|------|
| | 20 | 30 | 40 | 50 | 60 | 70 | 80 |
| 20 | nh | 14.0 | 9.7 | 6.4 | 3.8 | 1.8 | - |
| 18 | nh | nh | 14.0 | 8.9 | 5.2 | 2.5 | 0.25 |
| 16 | nh | nh | nh | 13.3 | 7.5 | 3.5 | 0.51 |
| 14 | nh | nh | nh | nh | 11.4 | 5.1 | 0.92 |
| 12 | nh | nh | nh | nh | nh | 8.0 | 1.6 |
| 10 | nh | nh | nh | nh | nh | 14.3 | 2.7 |
| 8 | nh | nh | nh | nh | nh | nh | 5.0 |
| 6 | nh | nh | nh | nh | nh | nh | 11.5 |
| 4 | nh | nh | nh | nh | nh | nh | nh |
| 2 | nh | nh | nh | nh | nh | nh | nh |

Thermal resistance (°C/W) of SHC06DC50

| Load current (A) | Surrounding Ambient Temperature (°C) | | | | | | |
|------------------|--------------------------------------|------|------|------|------|------|------|
| | 20 | 30 | 40 | 50 | 60 | 70 | 80 |
| 50 | 4.3 | 3.3 | 2.4 | 1.6 | 0.9 | 0.22 | - |
| 45 | 6.0 | 4.6 | 3.4 | 2.3 | 1.3 | 0.47 | - |
| 40 | 8.8 | 6.7 | 4.9 | 3.3 | 2.0 | 0.82 | - |
| 35 | 14.3 | 10.3 | 7.4 | 5.0 | 3.0 | 1.3 | - |
| 30 | nh | 18.7 | 12.3 | 8.0 | 4.7 | 2.2 | 0.18 |
| 25 | nh | nh | nh | 14.8 | 8.2 | 3.8 | 0.59 |
| 20 | nh | nh | nh | nh | 17.5 | 7.2 | 1.4 |
| 15 | nh | nh | nh | nh | nh | 18.5 | 3.2 |
| 10 | nh | nh | nh | nh | nh | nh | 10.3 |
| 5 | nh | nh | nh | nh | nh | nh | nh |

Note: 'nh' means no heatsink necessary. The SSR should still be tightened to a surface to ensure optimal thermal dissipation.

Thermal Data

| | SHC06DC10 SHC06DC20 SHC06DC50 | SHC06DC100 | SHC20DC20 | SHC20DC50 | SHC50DC10 |
|--|-------------------------------------|------------|-----------|-----------|-----------|
| Max. Junction Temperature | 175°C | 175°C | 150°C | 150°C | 150°C |
| Junction to Case Thermal Resistance, R_{thjc} | 1.2°C/W | 0.6°C/W | 0.9°C/W | 0.45°C/W | 1.5°C/W |
| Case to Heatsink Thermal Resistance, R_{thcs}⁵ | 0.2°C/W | 0.2°C/W | 0.1°C/W | 0.1°C/W | 0.2°C/W |

5: Thermal resistance case to heatsink values are applicable upon application of a fine layer of silicon based thermal paste from Electrolube between SSR and heatsink.

Environmental Specifications

| | |
|------------------------------|---|
| Operating Temperature | -20°C to 80°C (-4°F to 176°F) |
| Storage Temperature | -40°C to +100°C (-40°F to +212°F) |
| Relative Humidity | 95% non-condensing @ 40°C |
| Pollution degree | 2 |
| Installation Altitude | 0-1000 m. Above 1000 m derate linearly by 1% of FLC per 100 m up to a maximum of 2000 m |
| Vibration Resistance | 2g / axis |
| EU RoHS Compliant | Yes |
| China RoHS |  |

The declaration in this section is prepared in compliance with People's Republic of China Electronic Industry Standard SJ/T11364-2014: Marking for the Restricted Use of Hazardous Substances in Electronic and Electrical Products.

| Part Name | Toxic or Harardous Substances and Elements | | | | | |
|----------------------------|--|--------------|--------------|------------------------------|--------------------------------|---------------------------------------|
| | Lead (Pb) | Mercury (Hg) | Cadmium (Cd) | Hexavalent Chromium (Cr(VI)) | Polybrominated biphenyls (PBB) | Polybrominated diphenyl ethers (PBDE) |
| Power Unit Assembly | x | o | o | o | o | o |

O: Indicates that said hazardous substance contained in homogeneous materials for this part are below the limit requirement of GB/T 26572.

X: Indicates that said hazardous substance contained in one of the homogeneous materials used for this part is above the limit requirement of GB/T 26572.

Short Circuit Protection

| Part No. | Prospective Short Circuit Current (kArms) | Ferraz Shawmut (Mersen) | | | Siba | | |
|------------|---|-------------------------|-------------|----------------------|-------------------|-------------|----------------------|
| | | Max Fuse Size (A) | Part Number | Voltage Rating (VDC) | Max Fuse Size (A) | Part Number | Voltage Rating (VDC) |
| SHC06DC100 | 5 | 125 | A4J125 | 300 | 125 | 5019006.125 | 440 |
| SHC20DC20 | | 25 | HSJ25 | 500 | 25 | 5019006.25 | 660 |
| SHC20DC50 | | 70 | HSJ70 | | 63 | 5019006.63 | |

Compatibility and Conformance

| | |
|--|--|
| Approvals |  |
| Standard Compliance | LVD: EN 60947-1 EMCD: EN 61000-6-2, EN 61000-6-3 EE: EN 60947-1 EMC: EN 61000-6-2, EN 61000-6-3 cURus: UL508 Recognized (E128555), NRNT2, NRNT8 CSA: C22.2 No. 14 |
| UL Short Circuit Current Rating | 5 kArms |

Electromagnetic Compatibility (EMC) - Immunity

| | |
|---|--|
| Electrostatic Discharge (ESD) | EN/IEC 61000-4-2 8 kV air discharge, 4 kV contact (PC2) |
| Radiated Radio Frequency | EN/IEC 61000-4-3 10 V/m, from 80 MHz to 1 GHz (PC1) 10 V/m, from 1 GHz to 2.7 GHz (PC1) |
| Electrical Fast Transient (burst) | EN/IEC 61000-4-4 Output 5 kHz, 100 kHz: 2 kV (PC2) Input 5 kHz, 100 kHz: 1 kV (PC2) |
| Conducted Radio Frequency | EN/IEC 61000-4-6 10 V/m, from 0.15 to 80 MHz (PC1) |
| Electrical Surge | EN/IEC 61000-4-5 Output, line to line: 1 kV (PC2) Output, line to earth: 1 kV (PC2) Input, line to earth: 1 kV (PC2) |
| Voltage Dips | EN/IEC 61000-4-11 0% for 10, 20, 5000 ms (PC2) 40% for 200 ms (PC2) 70% for 500 ms (PC2) 80% for 5000 ms (PC2) |
| Voltage Dips, Short Interruptions and Voltage Variations | EN/IEC 61000-4-29 0% for 1, 3, 10, 30, 100, 300, 1000 ms (PC2) 30% for 10, 30, 100, 300, 1000 ms (PC2) 40% for 10, 30, 100, 300, 1000 ms (PC2) 60% for 10, 30, 100, 300, 1000 ms (PC2) 70% for 10, 30, 100, 300, 1000 ms (PC2) 80% on min. 19.2 VDC for 10, 30, 100, 300, 1000, 3000, 10000 ms (PC2) 120% on min. 29.8 VDC for 10, 30, 100, 300, 1000, 3000, 10000 ms (PC2) |

Electromagnetic compatibility (EMC) - Emissions

| | |
|---|---|
| Radio Interference Field Emission (Radiated) | EN/IEC 55011 Class B: from 0.15 to 30 MHz |
| Radio Interference Voltage Emissions (Conducted) | EN/IEC 55011 Class B: from 30 MHz to 1 GHz |

Note:

Control input lines must be installed together (i.e. a 2 core cable) to maintain products' susceptibility to Radio Frequency interference

- Performance Criteria 1 (PC1): No degradation of performance or loss of function is allowed when the product is operated as intended.
- Performance Criteria 2 (PC2): During the test, degradation of performance or partial loss of function is allowed. However when the test is complete the product should return operating as intended by itself.

Connection Diagrams

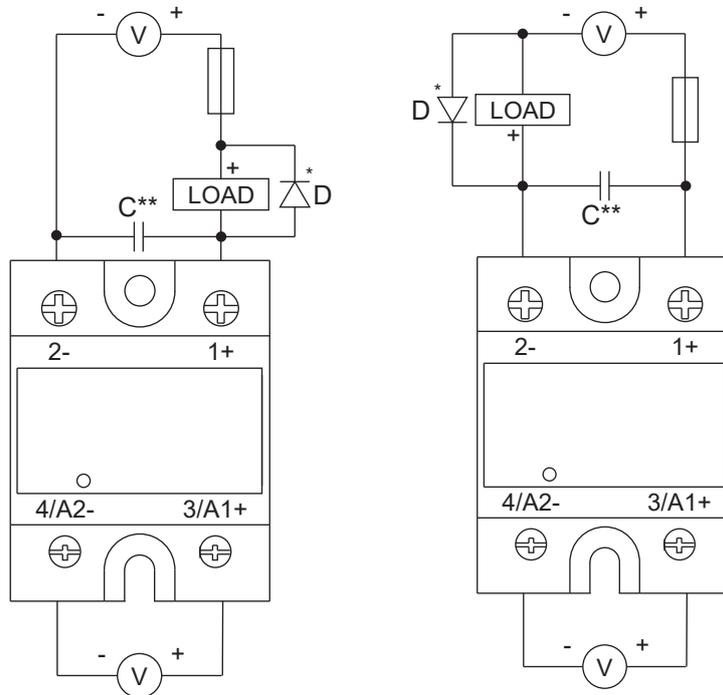


Fig. 8 SHCDC connection diagrams

* A suppressor diode D is required for inductive loads.

** Applicable only to SHC20DC

The wiring cables in a DC system act as an inductor and upon switching of the load, voltage transients exceeding the max. SSR voltage may result, leading to SSR damage. The SHCDC output is protected with an internal transient suppressor, however, this internal component is not intended for repetitive operation as may happen in situations with repetitive voltage transients (for example with high switching frequencies). The internal transient suppressor will fail prematurely. Hence, for the **SHC20DC** models, when used at switching frequencies >1Hz it is strongly recommended to connect capacitor C across the SSR output as shown in Fig. 8 to protect the SSR output from damages resulting from uncontrolled transients.

Capacitor C is not necessary (even at high switching frequencies) if the voltage transients can be controlled and cannot exceed the absolute maximum voltage rating of the SSR.

CAUTION!

Specifically for the **SHC20DC20**, if C is required due to high switching frequencies as explained above, the absolute maximum output voltage of the SSR shall be limited to 150 VDC.



Functional Diagrams

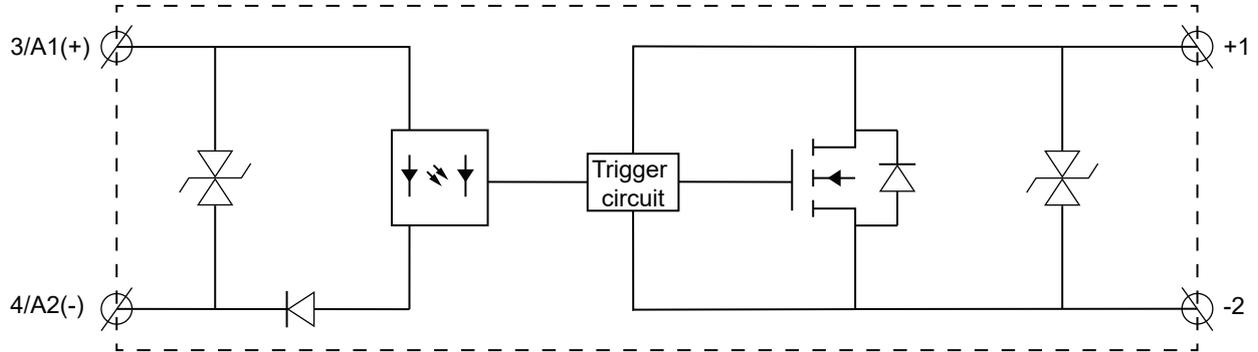


Fig. 9 SHCDC series Functional Diagram

Installation

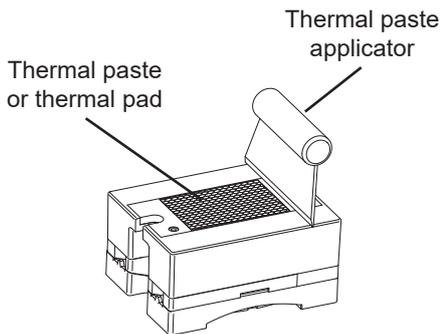


Fig. 10 A fine layer of thermally conductive silicone paste shall be evenly distributed to the base of the SSR before mounting on a heat dissipator. Alternatively a thermal pad may be used. The thermal interface material affects the thermal performance. Make sure that the heatsink is sized properly.




Fig. 11 Tighten screws alternately to 0.5 Nm and then continue to max. 2.0 Nm.




Fig. 12 Mount heatsink with fins in the vertical orientation to guarantee the best possible airflow through the heatsink.



Connection Specifications

| | 1+, 2- | | 3/A1+, 4/A2- | | |
|---|----------------------------------|--|--|--|--|
| | | | | | |
| Mounting Screws (SSR to heatsink) | M5, not provided with SSR | | | | |
| Mounting Torque (SSR to heatsink) | 1.5 - 2.0 Nm (13.3 - 17.7 lb-in) | | | | |
| Conductors | Use 75°C copper (Cu) conductors | | Use 60/75°C copper (Cu) conductors | | |
| Stripping Length, X | 12 mm | | 8 mm | | |
| Connection Type | M5 screw with captivated washer | | M3 screw with captivated washer | | |
| Rigid (Solid & Stranded) UR/CSA rated data | | 1x 2.5 - 6.0 mm ² 1x 14 - 10 AWG | 2x 2.5 - 6.0 mm ² 2x 14 - 10 AWG | 1x 0.5 - 2.5 mm ² 1x 18 - 12 AWG | 2x 0.5 - 2.5 mm ² 2x 18 - 12 AWG |
| Flexible with End Sleeve | | 1x 1.0 - 4.0 mm ² 1x 18 - 12 AWG | 2x 1.0 - 2.5 mm ² 2x 2.5 - 4.0 mm ² 2x 18 - 14 AWG 2x 14 - 12 AWG | 1x 0.5 - 2.5 mm ² 1x 18 - 12 AWG | 2x 0.5 - 2.5 mm ² 2x 18 - 12 AWG |
| Flexible without End Sleeve | | 1x 1.0 - 6.0 mm ² 1x 18 - 10 AWG | 2x 1.0 - 2.5 mm ² 2x 2.5 - 6.0 mm ² 2x 18 - 14 AWG 2x 14 - 10 AWG | - | - |
| Torque Specifications | | Poizdrive 2 2.4 Nm (21.2 lb-in) | | Poizdrive 1 0.5 Nm (4.4 lb-in) | |
| Aperture for Termination Lug | 12 mm | | 7.5 mm | | |

Questions? Call us at (914) 592-7726. www.alltechelectronics.com